


VICTRON ENERGY
LYNX DISTRIBUTOR
SHOWN WITH COVER OFF

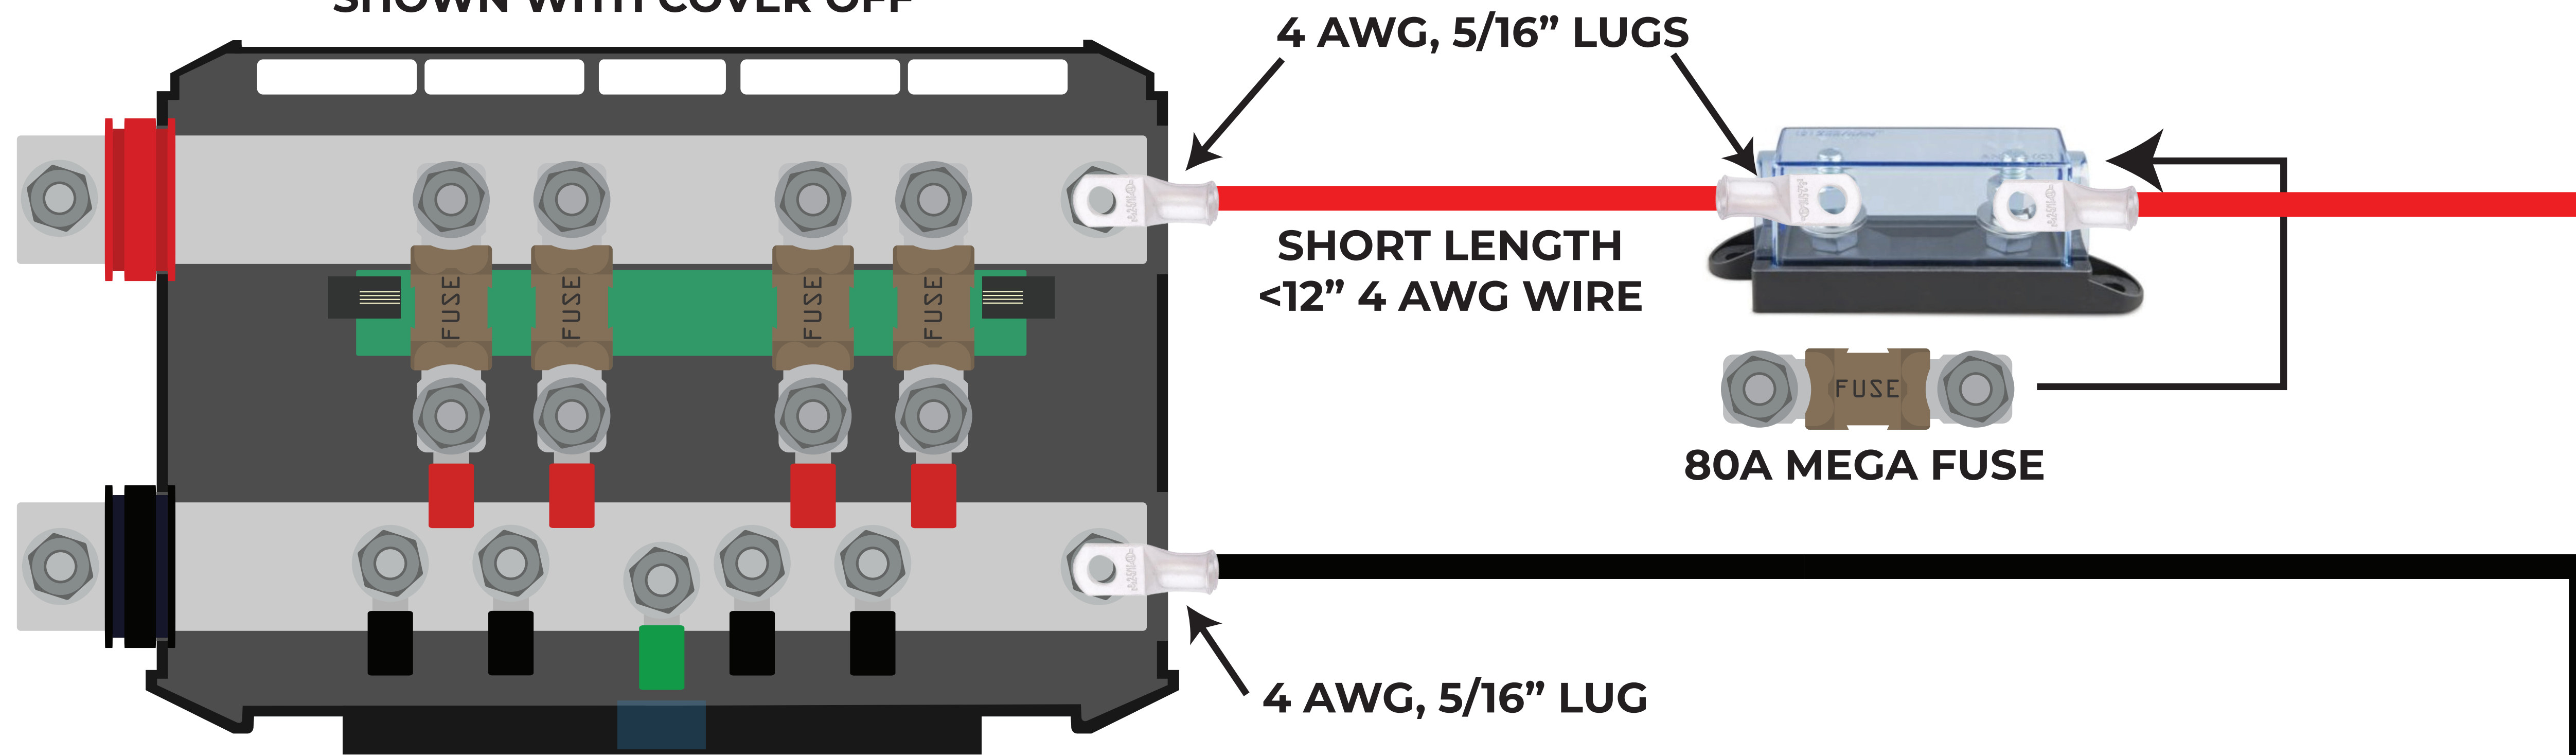

4 AWG, 5/16" LUGS

SHORT LENGTH
<12" 4 AWG WIRE

80A MEGA FUSE

4 AWG, 5/16" LUG

NOMADIC COOLING X2
ROOFTOP AIR CONDITIONER



DC POWER SUPPLY WIRES FROM BOTTOM OF
AC UNIT WITH CONNECTORS REMOVED

SPLICERS USED TO BRIDGE DC SUPPLY
TO AIR CONDITIONER. COVER WITH
INCLUDED HEAT SHRINK AFTER SPLICING.

4 AWG WIRE FROM DC SOURCE
TO AIR CONDITIONER LOCATION
25' OF RED AND BLACK WIRE INCLUDED



REMOVE CONNECTOR
THE AC UNIT WILL HAVE
A SHORT POWER SUPPLY WIRE
WITH AN "ANDERSON" CONNECTOR
COMING OUT OF THE BOTTOM OF
THE UNIT. YOU WILL NEED
TO REMOVE THIS CONNECTOR
IN ORDER TO USE THE SPLICERS
IN OUR KIT.



VANLIFE
OUTFITTERS

**NOMADIC COOLING X2
BASIC DIY INSTALLATION KIT
12-VOLT**

Note: wire gauge included in the kit is based on a relatively short wire run installed into a small vehicle like a van. Please use an ampacity calculator such as the "Blue Sea Circuit Wizard" when sizing your wire for your particular situation.

